

Amendment No. 1

TO REQUEST FOR QUOTATION FOR LOW-VALUE GOODS

Date: March 15, 2019
Regarding: RFQ/013/19 – Supply of Cooling complex to Karakalpakstan, including installation

This Amendment is submitted to RFQ/013/19 announced on March 12, 2019, for the "Supply of Cooling complex to Karakalpakstan, including installation"

Changes are as follows:

1. "Description and specification of goods" is revised and to be read as stipulated in Annex No. 1 below, which is an integral part of this Amendment No. 1.
2. "Bid Submission Form» is revised and to be read as stipulated in Annex No. 2 below, which is an integral part of this Amendment No. 1.

All Amendments to the RFQ/013/19 are an integral part of it, and all participants must comply with the requirements stipulated by such additions. Any deviation from the claims made by amendments to this RFQ may result in consideration of the proposal as not meeting the requirements and withdrawing from further evaluation.

All other terms and conditions of the RFQ/013/19 remain unchanged.

#	Item/s to be supplied	Q-ty	Description/Specification of goods
1	COLD ROOMS CONSISTING OF 2 CONSECUTIVE CHAMBERS FOR 75 TONS EACH	2 sets	<p>Designation</p> <p>Refrigeration complex for cooling and storage of fruits and vegetable in the temperature range -5 +5 °C</p> <p>Stored weight - 75 tons for each chamber;</p> <p>Products inlet temperature: +2 °C;</p> <p>Products outlet temperature: +2 °C;</p> <p>Humidity: 75% to 90%.</p> <p>Overall dimensions: length 11,72m; width 14,40m, height (internal side of premise) 5,0m;</p> <p>Size of a chamber: length 11,72m; width 7,20m; height (internal side of premise) 5,0m (2 chambers).</p> <p>Refrigeration units Bitzer or equivalent. Type – semi-hermetic. Placement of units near the complex; provide fencing refrigeration machines.</p> <p>Requirements for evaporators:</p> <ol style="list-style-type: none"> 1. Insulated condensate collection tray; 2. Electric drain pipe heater; 3. Electric defrosting. <p>WALL AND CEILING INSULATING STRUCTURE:</p> <ul style="list-style-type: none"> - Sandwich panels (complete with mounting profile) with polyurethane foam base (PUF), refrigerated, with a polyurethane foam filler of 41-43kg/m³ (length from 2000mm to 11000mm, working width 960mm, panel thickness 100mm, metal thickness 0.4mm-0.7mm) – 501.4m²; - Thermal doors retractable for refrigerating chambers 2400mm x 1600mm, thickness 100mm polyurethane, with a set of rail accessories – 2pcs; - Floor polystyrene 100mm thick, Polystyrene foam polystyrene foam, 18-25 kg/m³ (with a length of 2000mm to 4000mm, a width of 1000mm, a panel thickness of 100mm) – 168.7m²; - LED lamps (in each chamber) of warm light with protective shades, excluding glass fragments falling on the product if damaged. Luminaires should be installed not lower than mark. + 5,000 from floor level – set; - Additional elements for sandwich panels: external and internal simple angles, profile (angle bar) under the sandwich panel, as well as other necessary elements for the construction of sandwich panels and rooms and doors – set. <p>COOLING SYSTEM:</p> <p>Complete cooling system set based on R404A or R407c refrigerant, R134a – 2 sets:</p> <ul style="list-style-type: none"> - Cooling temperature: up to -5 C°; - Compressor-condenser, semi-hermetic, Bitzer or equivalent, with oil separator, mirror for monitoring the state of the refrigerant in the system; - Evaporator (air cooler), the difference, (Delta) temperature in the heat exchanger and the air in the chamber is not more than 6 °C; - A full package of fittings, TRV and copper pipelines, combining hardware and cooler; - Electronic control unit; - The kit should have electrical wiring and refrigerant in sufficient quantity to operate the system. <p>CERTIFICATION AND STANDARDS:</p> <ul style="list-style-type: none"> - The offered cooling system must be from the manufacturer adhering to ISO 9001 quality system (internationally recognized quality certification systems equivalent to ISO will also be considered).
2	INSTALLATION, COMMISSIONING AND TRAINING	1 site	<p>Designation</p> <ul style="list-style-type: none"> - Installation, adjustment, starting up and commissioning of the cooling chambers by the Supplier's qualified staff and training of the End-user personnel.

Figure 1. Layout of refrigeration chambers:


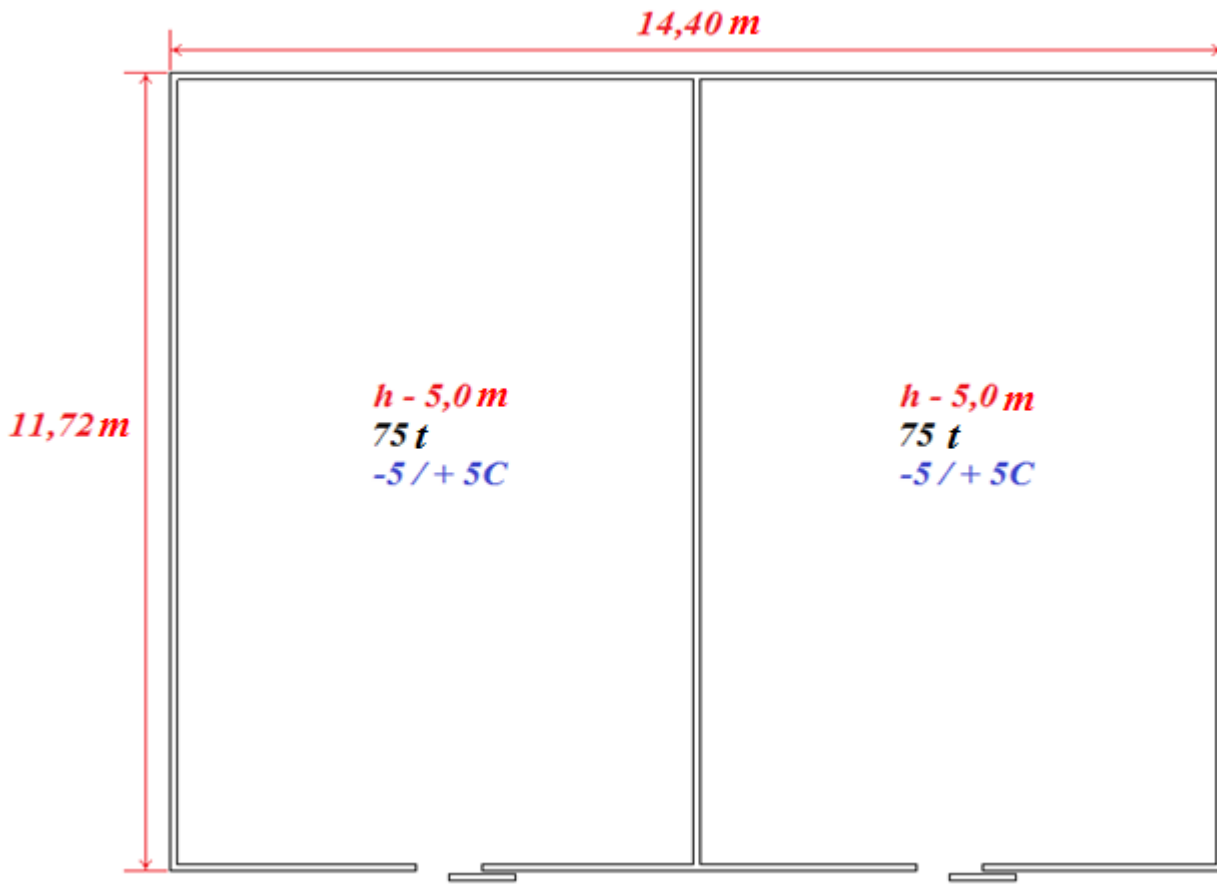


Figure 2. Front view of the refrigerator compartment:

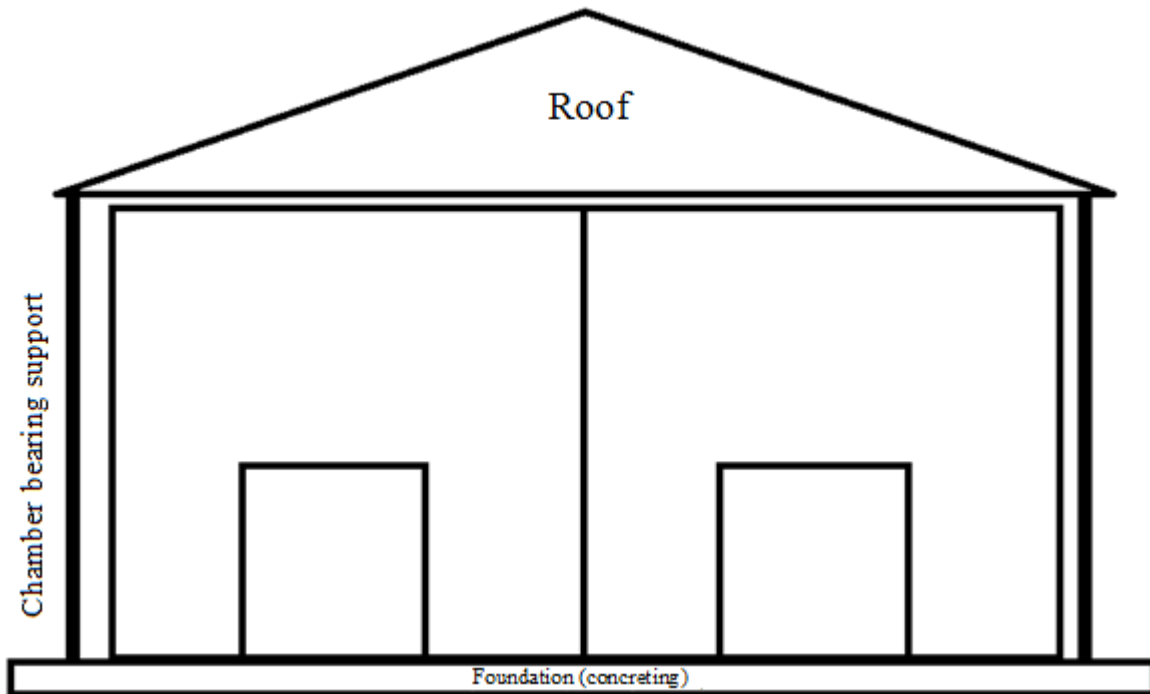

**Work on concreting, installation of the bearing support and roof of the refrigerating chamber, taking into account all building materials, is covered by the beneficiary / end user!*

FORM FOR SUBMITTING SUPPLIER'S QUOTATION

(This Form must be submitted only using the Supplier's Official Letterhead/Stationery)

We, the undersigned, hereby offer to supply the items listed below in conformity with the technical specifications and requirements of UNDP as per RFQ Reference No. RFQ/013/19

#	Item/s to be supplied	Q-ty	Description/Specification of goods	Unit price (currency)	Total price (currency)
1	COLD ROOMS CONSISTING OF 2 CONSECUTIVE CHAMBERS FOR 75 TONS EACH	2 sets	<p>Designation</p> <p>Refrigeration complex for cooling and storage of fruits and vegetable in the temperature range -5 +5 °C Stored weight - 75 tons for each chamber; Products inlet temperature: +2 °C; Products outlet temperature: +2 °C; Humidity: 75% to 90%. Overall dimensions: length 11,72m; width 14,40m, height (internal side of premise) 5,0m; Size of a chamber: length 11,72m; width 7,20m; height (internal side of premise) 5,0m (2 chambers). Refrigeration units Bitzer or equivalent. Type – semi-hermetic. Placement of units near the complex; provide fencing refrigeration machines. Requirements for evaporators: 1. Insulated condensate collection tray; 2. Electric drain pipe heater; 3. Electric defrosting.</p> <p>WALL AND CEILING INSULATING STRUCTURE:</p> <ul style="list-style-type: none"> - Sandwich panels (complete with mounting profile) with polyurethane foam base (PUF), refrigerated, with a polyurethane foam filler of 41-43kg/m³ (length from 2000mm to 11000mm, working width 960mm, panel thickness 100mm, metal thickness 0.4mm-0.7mm) – 501.4m²; - Thermal doors retractable for refrigerating chambers 2400mm x 1600mm, thickness 100mm polyurethane, with a set of rail accessories – 2pcs; - Floor polystyrene 100mm thick, Polystyrene foam polystyrene foam, 18-25 kg/m³ (with a length of 2000mm to 4000mm, a width of 1000mm, a panel thickness of 100mm) – 168.7m²; - LED lamps (in each chamber) of warm light with protective shades, excluding glass fragments falling on the product if damaged. Luminaires should be installed not lower than mark. + 5,000 from floor level – set; - Additional elements for sandwich panels: external and internal simple angles, profile (angle bar) under the sandwich panel, as well as other necessary elements for the construction of sandwich panels and rooms and doors – set. <p>COOLING SYSTEM:</p> <p>Complete cooling system set based on R404A or R407c refrigerant, R134a – 2 sets:</p>		

			<ul style="list-style-type: none"> - Cooling temperature: up to -5 C°; - Compressor-condenser, semi-hermetic, Bitzer or equivalent, with oil separator, mirror for monitoring the state of the refrigerant in the system; - Evaporator (air cooler), the difference, (Delta) temperature in the heat exchanger and the air in the chamber is not more than 6 °C; - A full package of fittings, TRV and copper pipelines, combining hardware and cooler; - Electronic control unit; - The kit should have electrical wiring and refrigerant in sufficient quantity to operate the system. <p>CERTIFICATION AND STANDARDS:</p> <ul style="list-style-type: none"> - The offered cooling system must be from the manufacturer adhering to ISO 9001 quality system (internationally recognized quality certification systems equivalent to ISO will also be considered). 		
2	INSTALLATION, COMMISSIONING AND TRAINING	1 site	<p>Designation</p> <ul style="list-style-type: none"> - Installation, adjustment, starting up and commissioning of the cooling chambers by the Supplier's qualified staff and training of the End-user personnel. 		
Total price of equipment					
Cost of transportation (delivery address: w/o number, Doslyk shosse, Takhtakupir district, Karakalpakstan)					
Cost of insurance (if applicable)					
Other costs (travel, accommodation)					
Total amount of the Offer, including all the costs					

Delivery address: w/o number, Doslyk shosse, Takhtakupir district, Karakalpakstan

Notes:

1. The bidders must quote genuine, branded products. UNDP may conduct post-delivery inspection at its sole discretions.
2. Price includes delivery to the place of installation / installation.
3. Site survey for post qualification purpose will be arranged on request (as applicable).
4. Brochures and Technical details of the model offered MUST be submitted with the bid offer (as applicable).

The UNDP General Terms and Conditions are an integral part of this RFQ and should be reviewed by all bidders.

<http://www.undp.org/content/undp/en/home/procurement/business/how-we-buy.html>.

In submitting a quotation, bidders expressly accept to be bound by these General Terms and Conditions.

Any Purchase Order resulting from this process shall incorporate them in full.

Please submit your quotation by completing the right column of the form below:

UNDP Requirements	Bidder's Response
Validity of Offer: <input checked="" type="checkbox"/> 60 days In exceptional circumstances, UNDP may request the Offeror to extend the validity of the Quotation beyond what has been initially indicated in this RFQ. In such case the extension shall be confirmed in writing, without any modification whatsoever of the Quotation.	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> Please explain in case of "No": _____
Warranty Period Offered (as applicable): Not less than 12 months	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> Please explain in case of "No": _____

<p>Description of Warranty Coverage (as applicable): Standard manufacturer's Warranty</p>	<p><input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> Please explain in case of "No": _____</p>
<p>Description of After Sales Service (as applicable):</p> <p><input checked="" type="checkbox"/> Warranty on Parts and Labor for minimum period of 12 months</p> <p><input checked="" type="checkbox"/> Technical Support</p> <p><input checked="" type="checkbox"/> Availability of a local service center for prompt response (at no additional cost for UNDP and / or end user) during the warranty period</p> <p><input checked="" type="checkbox"/> Availability of all parts in a short notice, but not more than within 5 calendar days from the date of receipt of UNDP's or end-user's request</p> <p><input checked="" type="checkbox"/> Elimination of inconsistencies and malfunctions during the warranty period, including delivery and replacement; replacement with completely new equipment if previously delivered one does not meet the standards, norms and / or cannot be repaired</p>	<p><input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> Please explain in case of "No": _____</p>
<p>Delivery Terms (linked to INCOTERMS 2010):</p> <p><input type="checkbox"/> FCA</p> <p><input type="checkbox"/> CPT</p> <p><input type="checkbox"/> CIP Tashkent</p> <p><input checked="" type="checkbox"/> DAP-Karakalpakstan (delivery address is below), or</p> <p><input checked="" type="checkbox"/> DDP-Karakalpakstan (delivery address is below)</p> <p><i>Delivery address: w/o number, Doslyk shosse, Takhtakupir district, Karakalpakstan</i></p> <p>Customs clearance¹, if needed, shall be done by UNDP Uzbekistan</p>	<p><input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> Please explain in case of "No": _____</p>
<p>Payment Terms:</p> <p>To Local Supplier (registered in Uzbekistan):</p> <p><input checked="" type="checkbox"/> Will be made in Uzbek Soum in two installments: (1) 15% advance payment upon signature of Contract by the sides; and (2) 85% final payment upon signature of Act of Acceptance of works completed and invoice by the parties.</p> <p>To Foreign Suppliers (registered outside Uzbekistan):</p> <p><input checked="" type="checkbox"/> Will be made in USD as 100% post-payment after delivery of the equipment to the destination place and signature of Act of Acceptance of Works completed by the parties.</p>	<p><input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> Please explain in case of "No": _____</p>
<p>Delivery terms:</p> <p>Applicable to local Companies: Within 60 calendar days from the date of prepayment receipt.</p> <p>Applicable to foreign companies: Within 60 calendar days from the date of Contract signature by the sides.</p> <p>Attention: If the delivery period, stated in the quotation exceeds the delivery period stated above, the respective offer may be declined!</p>	<p><input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> Please explain in case of "No": _____</p>
<p>For evaluation purposes all technical documentation, including operating and maintenance manuals can be submitted in English, but all technical documentation in Russian language will be requested with delivered equipment</p>	<p><input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> Please explain in case of "No": _____</p>
<p>Liquidated Damages:</p> <p><input type="checkbox"/> Will not be imposed</p> <p><input checked="" type="checkbox"/> Will be imposed under the following conditions: Percentage of contract price per day of delay: 0.5%. Max. no. of days of delay: 15 calendar days.</p>	<p><input type="checkbox"/> Accept <input type="checkbox"/> Does not accept <input type="checkbox"/> Please explain in case of "Does not accept": _____</p>

¹ Must be linked to INCO Terms chosen

After which UNDP may terminate the contract.	
Please confirm that your company is not included in the UN Security Council 1267/1989 list, UN Procurement Division List or other UN Ineligibility List;	<input type="checkbox"/> Not listed <input type="checkbox"/> Listed <input type="checkbox"/> Please explain in case of "Listed": <hr/>
Please confirm that you accept the UN Supplier Code of Conduct, available at https://www.un.org/Depts/ptd/about-us/un-supplier-code-conduct	<input type="checkbox"/> Accept <input type="checkbox"/> Does not accept <input type="checkbox"/> Please explain in case of "Does not accept": <hr/>

[Name and Signature of the Supplier's Authorized Person]
[Designation]
[Date]