




## Solar Panels in 5 strings in parrells

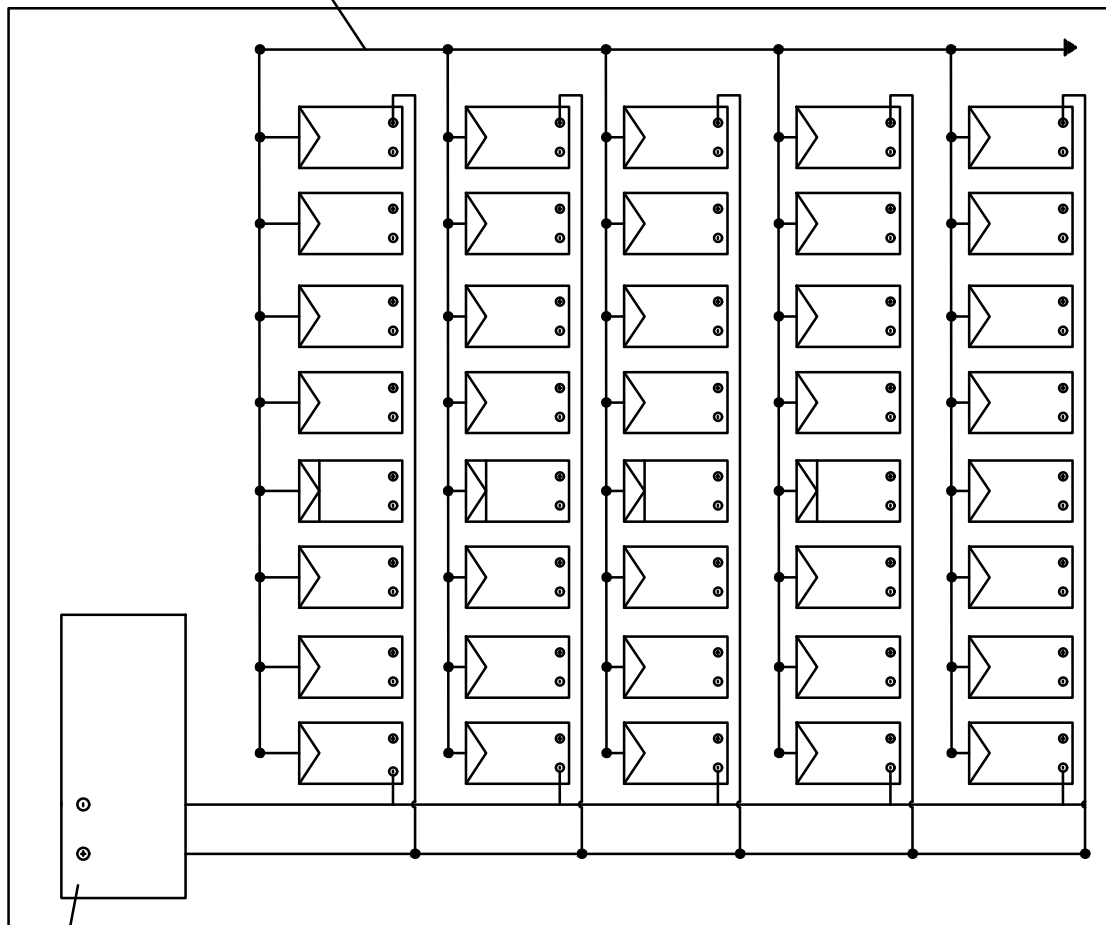

Controller

### Notes:

- The solar cell shall be mounted on galvanized stands
- The total output of the solar cells shall be decided after pumping test  
but should not be less 3.5KVA
- The solar stands shall be fixed with plain concrete footings
- The solar cell be properly installed to manufacturers directions
- All electrical cables shall be through electrical pipes protected and trenched
- Bidder quoting for different arrangement or design has to state so and should provide all necessary information for evaluation

Project :	Dagareis Water Yard		
Content :	Solar Cells Wiring		
drawn By:	March. 2019	07	