



Empowered lives.
Resilient nations.

July 14th, 2019

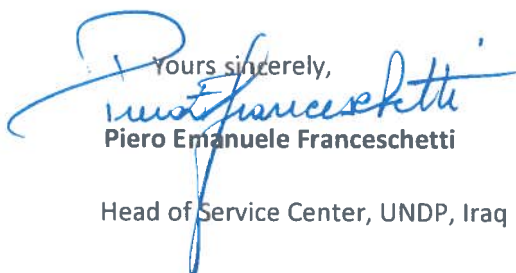
ADDENDUM 01

**ITB 171/19 -Rehabilitation of Women Dormitory in Northern Technical University (NTU)-East Mosul-
Ninawa Governorate.**

Following clarifications were sought during the site visit. Please see UNDP responses below.

Item No:	BIDDER QUESTIONS ASKED	UNDP RESPONSES GIVEN
1	How is wiring installation for the interior electrical system?	A concealed conduit wiring system is required as per details indicated in the BOQ under electrical works.
2	Where the hood will be used?	This item will be used inside of the kitchens in the dormitory building. As per BOQ specifications. (Mechanical line item 7)
3	Are all the tiles will be replaced or some parts?	The tiles will be replaced for specific places according to the attached drawings (Drawing plan) and BOQ quantities (Civil line item 38).
4	Will all building's roof will be repaired?	Yes, as per the specifications and quantities specified in the BOQ (Civil line item 26).
5	Are all WC rooms will be removed with all sanitary works?	Yes, all the WC included with sanitary works and ceramic tiles will be replaced.
6	Where anti acid ceramic tile will be used?	The anti-acid ceramic tiles will be used for the fountain in the outdoor garden. As per BOQ (Civil line item 39)

This Addendum -01 forms an integral part of the ITB-171/19 All other Terms and Conditions in this ITB will remain unchanged.

Yours sincerely,

Piero Emanuele Franceschetti
Head of Service Center, UNDP, Iraq