

Existing Exit luminaries to be replaced. These shall be installed directly above the doors. The contractor shall ensure that all conduits are recessed into the wall.

LEGEND

Other/Existing Installation

○ Lighting Fixture

⊗ Denotes luminaries to be retained and relocated.

New Installation

◀▶ Emergency Exit Sign

Note: FFL 0.00 relates to absolute level DVR90 (+2.500)

| Rev. | Date/ Dato | Description/ Beskrivelse | Prpd. | Chkd. | Appd. |
|------|---------------|-----------------------------|-------|-------|-------|
| 0.0 | 05.02.2021 | First Issue | EE | KA | FP |




ARUP

Axel Towers Axeltorv 2K 3rd Floor 1609 Copenhagen V
Tel: +45 3377 0760
www.arup.com

Client/Bygherre
UN Common Services

Project Title/Sag
**UN City Refurbishment Projects
Access Doors**

Key Plan/Oversigtsplan

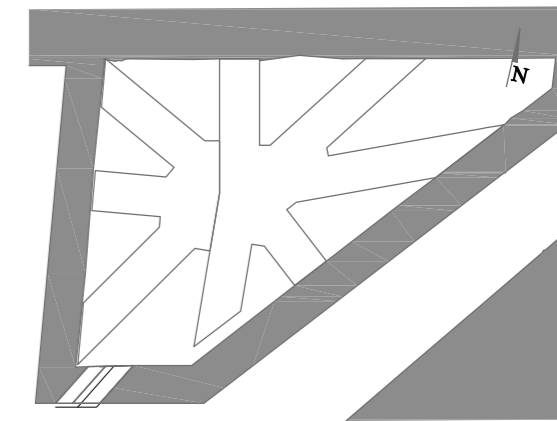

Drawing Title/Emne
**Reflected Ceiling Plan
Electrical - Lighting**

Scale at A3/
As indicated

Role
Mechanical and Electrical

Suitability
Issue for Tender

| | |
|--|-------------------|
| Arup Job No/Sagsnummer 267199-30 | Rev 0.0 |
|--|-------------------|

Name/Tegningsnummer

ACC-ARUP-ZZ-00-DR-E-2001

- Notes:
- Existing luminaries, power and associated controls to be retained.
 - Contractor shall investigate the existing emergency lighting provision and report these back to the engineer for final confirmation of any changes to type, number and location
 - Exit signage shall be incorporated into the door frame. Contractor to coordinate this with the manufacturer.

Ceiling Plan
1 : 50