



MINISTRY OF EDUCATION & HIGHER EDUCATION GENERAL DIRECTORATE FOR BUILDINGS

Project Name: MaIntenence Of Zelf Girls School

And Susya Coed School


Project No.:


Titl:Panel Board For Ceiling Of Claaroom


Date: 2019

Drawing # : 22







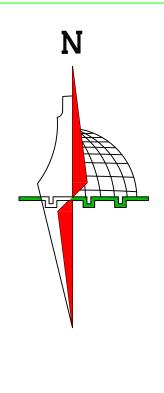



MINISTRY OF EDUCATION & HIGHER EDUCATION GENERAL DIRECTORATE FOR BUILDINGS


Project Name: Maintenence Of Zelf Girls School And Susya Coed School


Project No :


Titl:Sockets And Lighting Fixture For New Claaroom


Date: 2019

Drawing # : 22

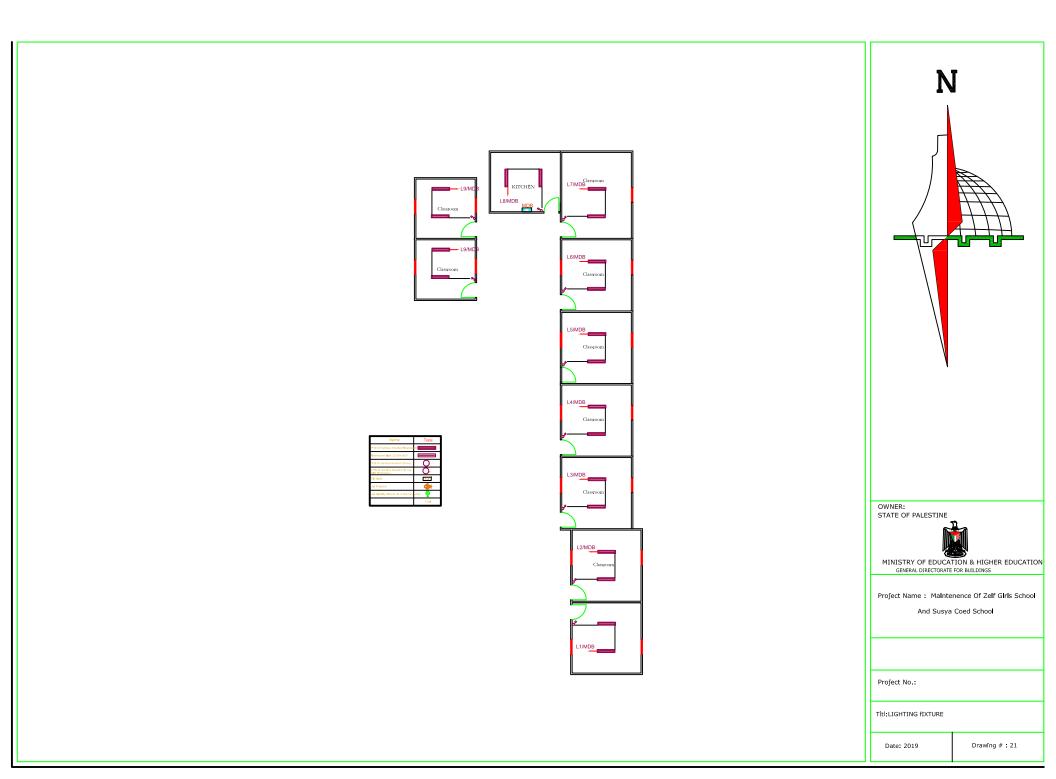

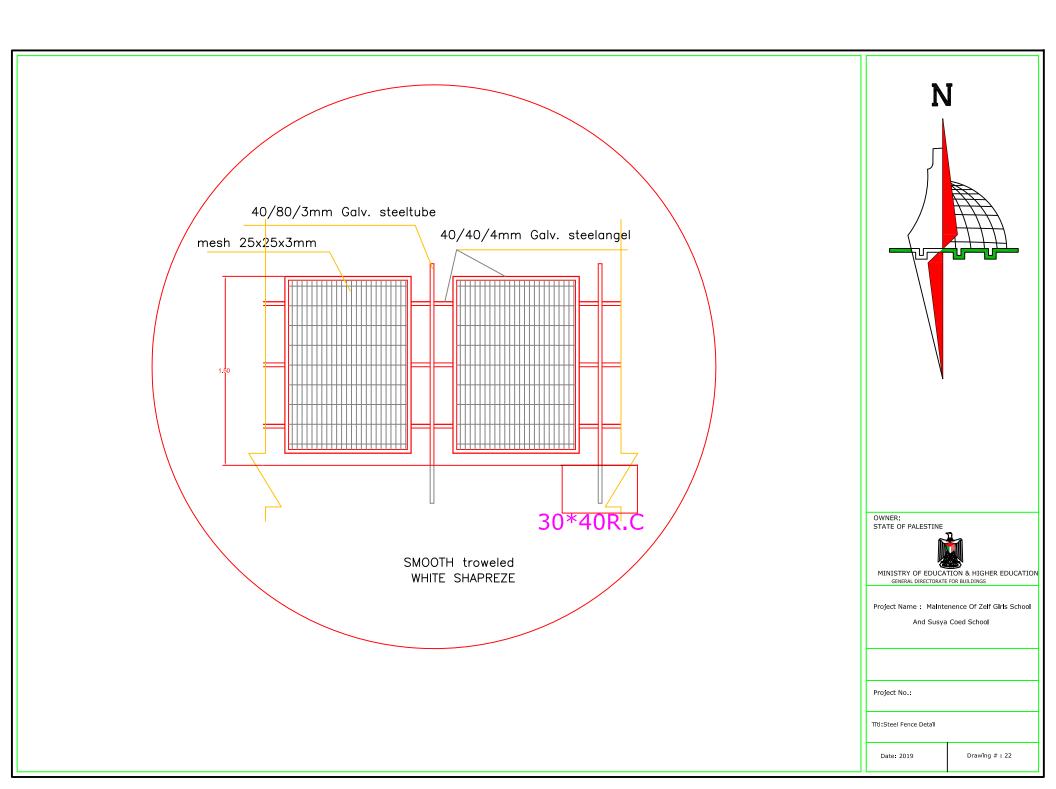

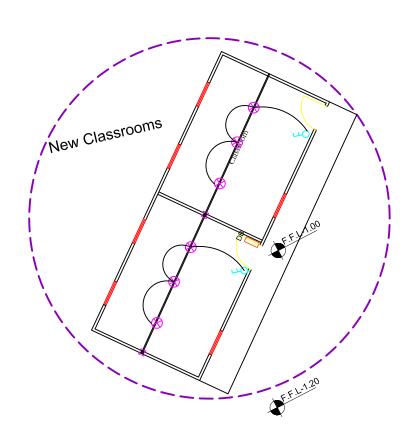

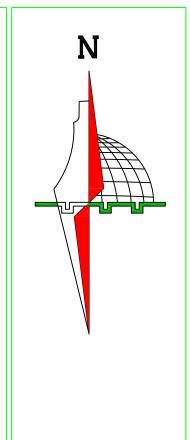



MINISTRY OF EDUCATION & HIGHER EDUCATION GENERAL DIRECTORATE FOR BUILDINGS

Project Name: MaIntenence Of Zelf GIrls School


And Susya Coed School


Project No

Title: structure canopy details

Date: 2019

Drawing # : 5

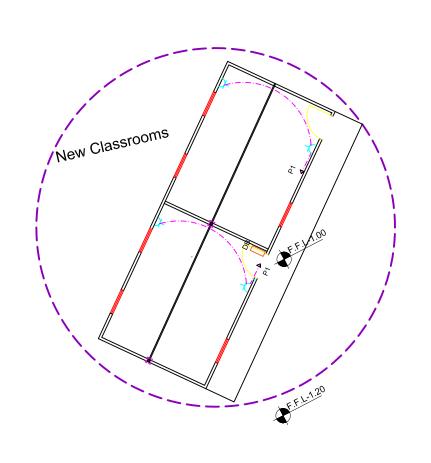

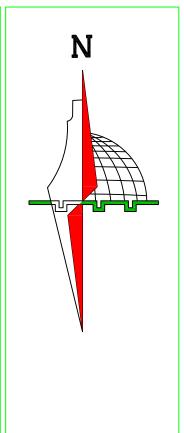



MINISTRY OF EDUCATION & HIGHER EDUCATION GENERAL DIRECTORATE FOR BUILDINGS

Project Name: MaIntenence Of Zelf Girls School

And Susya Coed School

Project No.:


Title: structure canopy details

Date: 2019

Drawing #:6


## FRAME 1 DIMENTION

Scale 1:25

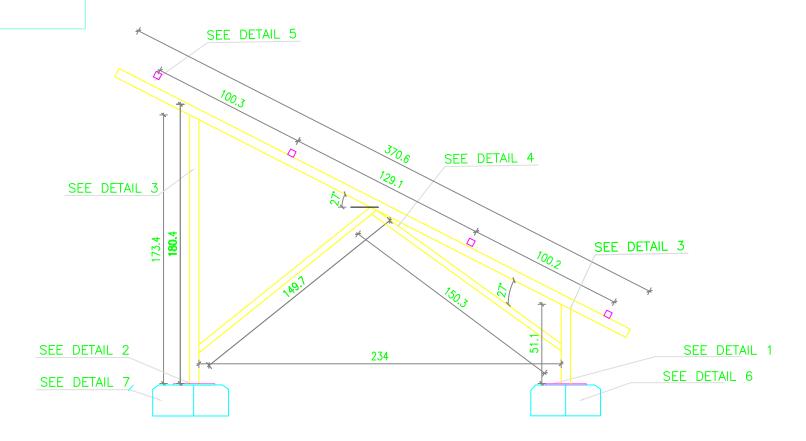


## FRAME 1 SECTIONS

Scale 1:25

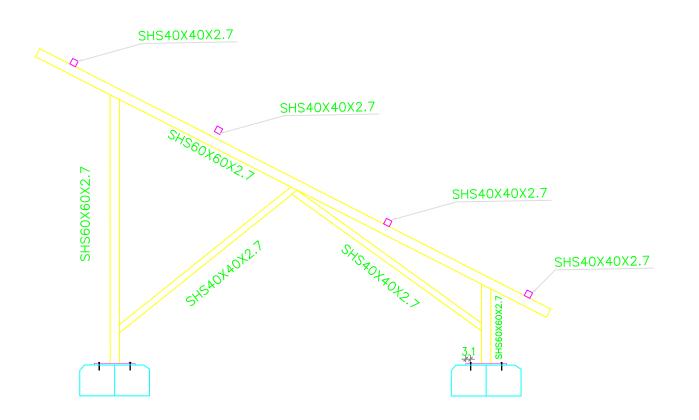


## **DETAIL 1**

Scale 1:10

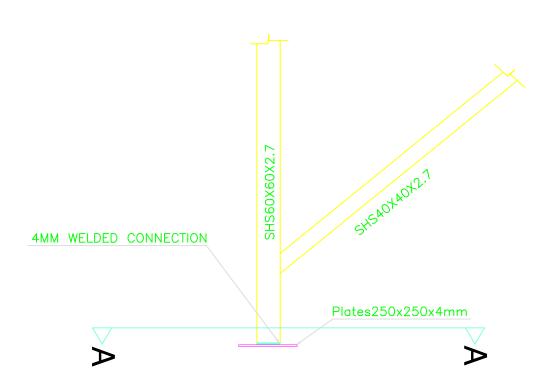

## **SECTION A-A**


Scale 1:5

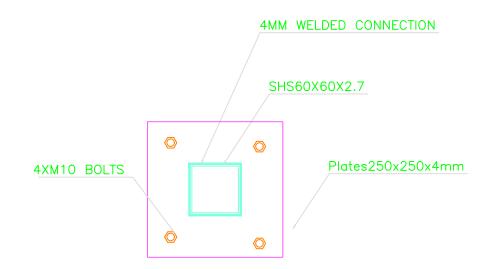

# **SECTION B-B**

## DETAIL 7

Scale 1:10

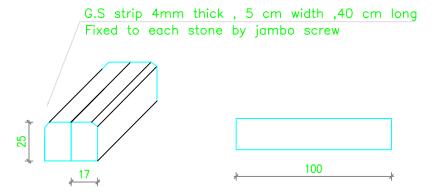

#### 1. PV Modules

Item	Description	
Thosa	Panels should include the following features:	
1 liese	Made from mono crystalline silicon	
2	minimum 320 Wp	
3	STC efficiency not less than 17 %	
4	Front cover is tempered solar glass	
5	Frame material is galvanized steel structure	
6	Exposed to a Flash Test	
7	Junction box is IP 65 or higher	
8	PV panels have a max. DC system voltage of 600V or more	
9	PV Panels have factory-pre mounted DC connectors of MC4 or H4	
9	type on min. 80 cm DC solar cable	
10	PV Panel manufacturer is certified according to ISO 9001 and ISO	
10	14001	
11	According to IEC 61215, IEC 61730 and ANSI/UL 1703 and TUV	
	Safety class II certifications, certified by a reputable independent	
	testing institute (e.g. UL, TUV, KEMA or the like).	
12	Potential Induced Degradation (PID) certificate, according to IEC	
	62804	
13	10-year warranty against defects from design, material or	
	workmanship, 25-year linear power output warranty for min. 80%	
	power output after 25 years, 90% after 10 years	
14	PV cells should be of grade A	
15	Third party bankruptcy right should be provided	
16	minimum space between photovoltaic modules for all sides are	
	0.5cm	
For O	FF grid system	
1	PV modules should be connected to produce an Open Circuit	
	Voltage of about $V_{oc}$ =90VDC ,	
2	Voltage at Maximum Power point about $V_{mmp} = 72V$	
3	Current at max power point about I <sub>mmp</sub> =42A .	
4	Peak Power: 2000Wp	
5	In addition to the hereafter specifications	

#### 2. Off Grid Inverter

Item	Description		
Inverter sho	ould include the following features; the inverters must be protect	cted from direct	t sunlight and
from direct	impact of rainfall.		
1	1phase, 0.4KV, 50Hz, sinusoidal output.		
2	min. 3 kW or greater		
3	AC output range 180 V – 280 V		
4	Transformer less		
5	Adjustable displacement power factor		
6	Suitable for outdoor mounting (IP 65).		
8	Max THD<3%.		
9	Wide Dc input range, max. DC voltage is min. 900V and		
	the DC voltage ripple (peak) <1.5%.		
10	Noise Level<50 dB (A).		
11	The inverter includes DC string fuses or electronic DC		
	string fuses for DC reverse current protection, a load-break		
	DC disconnect, DC surge arrestors (surge protection		
	devices) Type II, terminals for all incoming DC string		
	cables		
12	Multilingual LCD display with interface display (text		
	line/graphic).		
13	Ground fault monitoring.		
14	integrated DC-sensitive RCD certified to DIN VDE 0126-		
	1-1		
15	Peak inverter efficiency > 97%, European efficiency >		
	96,5%		
16	Provided with integrated DC load-break disconnect		
17	Compatible with industry-standard monitoring and GSM		
	data communication systems (e.g. Meteocontrol, Fat		
	Spaniel) or similar system provided by the inverter		
10	manufacturer		
19	Conforming to, AS 3100 , IEC 62109,EN61000-6 DIN V		
	VDE V 0126-1-1:2006-02, according to IEC 60529 and		
20	VDE AR-N-4105		
20	Protection class (according to IEC 62103) / overvoltage		
21	category (according to IEC 60664-1)		
21	Number of MPP not less than trackers 2 (A:2; B:2)		

### 3. Monitoring System

Item	Description	
	Remote Monitoring System which Monitor the following and	
1	er data to an password-protected internet-based portal where data	
can be	e retrieved remotely and saved on existing local TDECO and PEA	
server	s:	
1	Detailed data about energy and power production, Data must be	
	recorded as 15-minute mean values	
2	DC input current and Voltage (total and per string)	
3	Inverter AC Voltage, Current, P.F, Real and reactive Power	
	output.(Total and per inverter)	
5	Web Box (data logger, ftp server)	
6	Cabling, switchboards with electrical equipment	
7	Remote monitoring software	
8	System must automatically provide alarm messages via E-Mail	
	and/or SMS in case of inverter breakdown, loss of AC power,	
	unusually low power production	
9	The software should has the ability to produce daily and monthly	
	reports and trends (graphs) and can be exported to excel sheet	

### 4. Digital kWh meter

	Item	Description		
1	The kWh	meter should have an accuracy of 0.5% or better		
2	The kWh	meter has a S0 digital interface for monitoring by	the	
	Remote N	Monitoring System		

#### 5. Solar Batteries

Item	Description	
1	This block consists of 16 battery cells each specified as	
	follows:	
2	* Type : Lead Acid with electrolyte solution	
3	* Nominal Cell Voltage : 2VDC	
4	* Ampere Hour Capacity: 875Ah at 10 Hour Discharge Rate	
	Ampere Hour	
5	* Efficiency : > 90%	
6	* Watt Hour Efficiency : >82%	

7	* Self Discharge Rate:< 3% of C10/ Month @25°C	
8	* Cycling Stability: > 1100 Cycle	
9	* Water Consumption: < 5Cm3 /Ah-Year (Operating Ambient	
	Temperature (-10 to+45°C)	
10	* Connectors: Appropriate Connectors for internal connection	
	of the 24 cells in series have to be submitted with the battery	
	cells.	
11	* Racks for installing the battery cells or an appropriate	
	container have to be delivered with.	
12	* In addition two hydrometers for measuring the gravity of the	
	electrolyte solution and all	
13	* accessories and tools necessary for installing and connecting	
	the battery block with the Charge Regulator as well as the	
	appropriate electrolyte solution with the complete battery	
	manual Have to be also delivered.	
14	* Number of Requested Battery Cells: 16	

### 6. Charge Regulator

Item	Description		
1	Input voltage range: 50-100VDC		
2	Output Voltage Range: 48-64VDC		
3	Nominal Power: 3000W		
4	Efficiency: > 92%		
5	Control: MPPT, Over Charge and Deep Discharge		
	Protection of the battery block		
6	Input Protection : Against Over Voltage and Miss		
	Poling		
7	Output Protection : Against Over Load and Short		
	Circuit		
8	Operating Temperature at Full Load : -10- 45°C		

#### 7. DC&AC Cables

Item	Description		
All ca	All cables should include the following features:		
1	UV-resistant, resistant against water and oil		
2	Minimum 4 kV AC test voltage (50 Hz, 1 minute)		
3	Halogen-free cables		

4	Approved for a temperature range of -40°C-120°C (max.	
	copper wire temperature)	
5	Flame retardant	
6	life expectancy greater than 25 years	
7	According TUV, VDE & UL Approved.	
8	DC cable: Double insulated, single core, rated DC voltage	
	1000V min	
9	AC cable: Double insulated, multi- core, rated AC voltage	
	0.6/1 kV	
10	DC cables should be inserted in conduits that buried 70	
	cm at least under finished base course	
11	AC cables should be inserted in conduits that buried 100	
	cm at least under finished base course	

### 8. Mounting Structure

Item	Description			
	·			
The moun	The mounting structures for the PV panels should include the			
following	features:			
1	The mounting structure is made of hot deep galvanized steel			
2	The mounting structure uses concrete strip foundations			
3	The bases of the mounting structure should be made of M12 steel or more and implanted in concrete bases of 60 cm depth with 60*60 cm width. The distance between two bases of the structure legs should not be more than 2 meters. All the bases should joint then with a mattress of concrete using a net of steel.			
4	The mounting system provides a fixed inclination of the modules between 25 and 30 degrees			
5	The mounting structure components are bonded together to guarantee potential equalization			
6	The mounting structure is earthed according to internationally accepted standards			
7	Bidder can prove that the mounting structures and the foundations thereof are structurally suitable to withstand all static loads (weight of modules, wind loads, snow load etc) that might occur according to the Site conditions			
8	The mounting structure uses standardized profiles with Plastic profile cover and mounting clamps for mounting the PV modules			
9	Hot-galvanized steel profiles 60*60*2.7.			
10	PV galvanized steel structure is tested by mechanical consultant according to ASCE 7-10 (IBC 2012)standard			
11	the Model Geometry will be checked using SAP2000			

	or similar software	
12	Design of connections, bearing plates and stability of	
	foundation will be checked	

#### 9. Electrical Panels

Item	Description
All Cab	inets should include the following features:
1	no access from the rear
2	Cabinets shall be made of 2mm hot coated or galvanized steel; dust and vermin proof
	with protection degree IP65 at least
3	30% surplus space
4	Main supply lines enter from bottom
5	include all structural elements required in order to install the switchboard including
	all bus bars, terminals, wiring, bolts, clamps, etc.
6	The switchboard
7	10 mm2 earthing wire shall be installed
8	Cabinets shall be wall-mounted and of front door opening type
9	This Electrical panel should be type tested according to IEC439-1
DC Elec	ctrical panel are inclusive followings:
1	Appropriate switches.
2	Serge protection devices for DC protection, against reverse current, S.C current with
	separate earthing bus bar.
3	Outing and incoming cables.
4	Bus bars and their coupling unit and casing spaces for cables.
5	Cable clamps/terminals and cable shoes, as required to form a complete unit.
6	All shall be in accordance specification, and the codes of practice and highest prevailing
	standards of engineering.
AC Ele	ctrical panel are inclusive followings:
1	Appropriate Three phase switches.
2	Serge protection devices for AC protection, against reverse current, S.C current with
	separate earthing bus bar.
3	Outing and incoming cables.
4	Bus bars and their coupling unit and casing spaces for cables.
5	Cable clamps/terminals and cable shoes, as required to form a complete unit.
6	All shall be in accordance specification, and the codes of practice and highest prevailing
	standards of engineering.
7	Indication Lamps rating 220V for the three phases.
8	Ampere meter rating (0-1000A) with transformer.
9	Voltmeter rating (0 - 1000V)

### 10. Earthing (grounding) System

Item	Description	
	·	
1	The earthing system should be according to	
	internationally accepted standards.	
2	Individual earthing system included copper rods,	
	copper wires, copper connectors, cable shoes, glands	
_	and accessories to complete job.	
3	The earthing system should not be connected to the	
	Grid eathing or Surge protection system.	
4	The system resistance should be less than 2 ohm from any location.	
5	copper rods could be 19mm diameter 1.5 m covered by	
	painted concrete manholes ,that installed (3-10) meters	
	distance between each other, connected as ring by	
	75mm2 non-insulated copper wire to be connected to	
	main grounding copper bus- bar.	
6	Each photovoltaic AL frame should be connected to	
	the galvanized steel structure with 10 mm2 earthing	
	wire at least	
7	The mounting structure should be connected with 16	
-	mm2 earthing wire at least to main earth bas-bar	
8	Each electrical panels or any metal equipment should	
	be connected to the 10 mm2 earthing wire at least	
9	Each inverters should be connected to the 10 mm2 earthing wire at least	
10	It should be 16 mm2 at least earthing wire from earth	
	bas bar	
11	Potential equalizer should be installed in each string;	
	every earthing cable will be connected to that equalizer.	
12	Electrodes should be covered using concrete manholes	
13	Pointed Ground Rod, Compression Coupler for Pointed	
	Rods	